

# POWER RELAY

## 1 POLE - 20A High Capacity Type

### FTR-K1 Series

#### ■ FEATURES

- High Capacity 20A (1 form A type)
- Low Profile (height: 15.7mm)
- High insulation
  - Insulation distance min. 10mm between coil and contact
  - Dielectric strength: 5,000VAC
  - Surge strength: 10,000V
- Class F coil wire
- Low coil power (Approx. 400mW)
- Safety standards: UL, CSA, VDE, CQC
- Flux proof, RT II
- RoHS compliant



#### ■ Applications

- Oven controls
- Electric heating controls
- Power supplies
- Air conditioning

#### ■ PARTNUMBER INFORMATION

**[Example]**     FTR-K1   A     K     012     W   -   HC  
                   (a)    (b)    (c)    (d)    (e)    (f)

(a)	Relay type	FTR-K1 : FTR-K1 Series
(b)	Contact configuration	A : 1 form A
(c)	Coil type	K : Standard sensitive
(d)	Coil voltage	012 : 5.....18VDC See coil data chart
(e)	Contact material	W : Silver alloy
(f)	Special type	HC : High capacity type (20A)

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-K1AK012W-HC Actual marking: K1AK012W-HC

# FTR-K1 SERIES

## ■ SPECIFICATION

Item	FTR-K1AK( )W-HC		Remark	
Contact Data	Configuration	1 Form A (SPST-NO)		
	Material	Silver alloy		
	Construction	Single		
	Contact rating	20A, 250VAC	Resistive	
	Resistance (Initial)	Max. 100mΩ	at 1A 6VDC	
	Max. carrying current	24A		
	Max. switching power	5,000VA		
	Max. switching voltage	440VAC		
	Min. switching load	100mA, 5VDC		
Coil	Rated power consumption	Approx. 400mW	At 20°C	
	Operate power consumption	Approx. 196mW	At 20°C	
	Operating temperature range	-40 °C to ~ +85 °C	No frost, no condense dew	
Time	Operate	Max. 15ms (without diode)	Normal voltage, without bounce	
	Release	Max. 5ms (without diode)	Normal voltage, without bounce	
Life	Mechanical	Min. 1 x 10 <sup>6</sup> operations		
	Electrical	Min. 50 x 10 <sup>3</sup> operations	At room temperature	
Insulation	Insulation resistance		Min. 1.000MΩ	
	Dielectric with-standing voltage	Open contacts	1.000VAC (50/60 Hz), 1 minute	
		Contacts to coil	5.000VAC (50/60 Hz), 1 minute	
	Surge strength		10,000V (1.2 x 50 μs)	Between coil and contacts
	Clearance/ Creepage		10.0 / 10.0mm	Between coil and contacts
	Insulation (IEC/EN61810-1)	Voltage	250V	
		Pollution degree	3	
		Material group	IIIa	
	Vibration resistance	Misoperation	10 to 55 Hz at single amplitude of 0.75mm	
		Endurance	10 to 55 Hz at single amplitude of 0.75mm	
Shock resistance	Misoperation	100m/s <sup>2</sup> (11±1ms)		
	Endurance	1.000m/s <sup>2</sup> (6±1ms)		

\* 1: Need to consider the heat from PCB when max. current is more than 10A.

\* 2: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

# FTR-K1 SERIES

## COIL Data

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10%( $\Omega$ )	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
005	5	62	3.5	0.5	Approx. 400
006	6	90	4.2	0.6	
012	12	360	8.4	1.2	
018	18	810	12.6	1.8	


Note: All values in the table are valid for 20°C and zero contact current unless otherwise specified.

\*: Specified operated values are valid for pulse voltage.

## SAFETY STANDARDS

Type	Compliance	Contact Rating
UL	UL508 E63614	Flammability: UL94-V0 (plastics)
		20A, 277VAC, Resistive, at 85°C
CSA	C22.2 No.14 LR40304	20A, 277VAC ( $\cos \varphi = 1$ )
VDE	IEC/EN61810-1	20A, 250VAC ( $\cos \varphi = 1$ )
CQC	GB/T21711.1	20A, 250VAC

## Dimensions

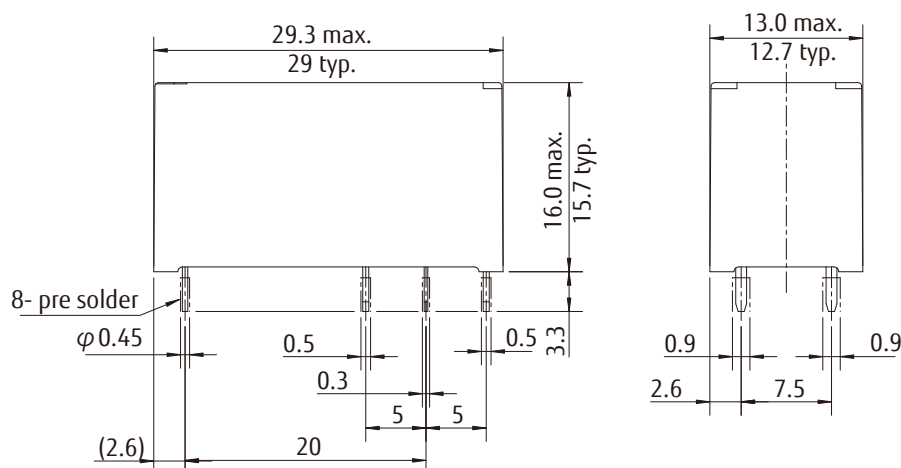


Note: Dimensions of the terminals do not include thickness of pre-solder.  
Dimensions do not include tolerance.

Unit: mm  
( ): Reference


# FTR-K1 SERIES

## Schematics (Bottom view)

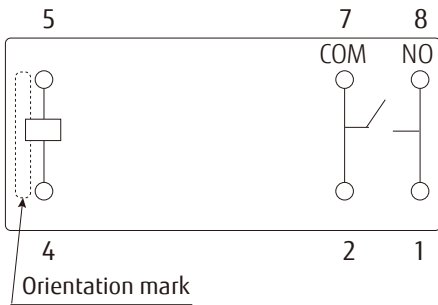

Connect terminal #1 and #8 on the PC board

## PC board mounting hole layout (Bottom view)

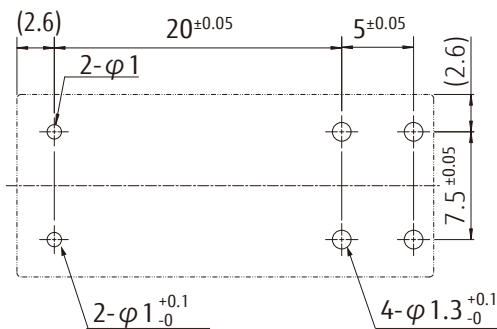

Unit: mm  
( ): Reference

## Cautions

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## RoHS Compliance and Lead Free Information

### 1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives.  
As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:  
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.  
This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Condition

- Recommended solder Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-heating: maximum 120°C  
within 90 sec.  
Soldering: dip within 5 sec. at  
255°C ± 5°C solder bath  
Relay must be cooled by air immediately  
after soldering

#### Solder by Soldering Iron:

Soldering Iron 30-60W  
Temperature: maximum 350-360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

<b>Japan</b> FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	<b>Asia Pacific</b> FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	<b>Korea</b> FUJITSU COMPONENTS KOREA LIMITED Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
<b>North and South America</b> FUJITSU COMPONENTS AMERICA, INC 2290 North First Street, Suite 212 San Jose, CA 95131, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	<b>China</b> FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcsh@cn.fujitsu.com Web: www.fujitsu.com/cn/products/devices/components	
<b>Europe</b> FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	<b>Hong Kong</b> FUJITSU COMPONENTS HONG KONG CO., LTD Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Tex: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

©2019 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. August 9, 2019