

POWER RELAY

1 POLE - 5A, TV-3 / TV-5 Type Relay

FTR-F3 Series

■ FEATURES

- High inrush 51A/78A, TV rating capability
- Flat and slim power relays
Flat type (right angle type): height: 7mm
Mounting space: 330mm²
Slim type (standard type)
Width: 7mm
Mounting space: 142mm²
- High inrush current contacts
- High insulation
Insulation distance: minimum 6mm between coil and contacts
(conforms to IEC 60065)
Dielectric strength: 4KV
Surge strength: 10KV
- Cadmium free contact for eco-program
- Safety standards
UL, CSA, VDE, CQC
- Plastic sealed relay, RTIII
- RoHS compliant
Please see page 6 for more information



■ Part Numbers

[Example] FTR-F3 P A 012 V
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-F3 : FTR-F3 series
(b)	Contact configuration	A : 1 form A, slim type P : 1 form A, flat type
(c)	Coil type (power)	A : 280mW
(d)	Coil rated voltage	012 : 3..... 24VDC Coil rating table at page 3
(e)	Contact material	V : AgSnO ₂ , TV-5 type T : AgSnO ₂ , TV-3 type

Actual marking does not carry the type name: "FTR"
E.g.: Ordering code: FTR-F3PA012V Actual marking: F3PA012V

FTR-F3 Series

■ Specifications

Item			FTR-F3(A;P)A(...)V	FTR-F3(A;P)A(...)T	Remarks / conditions	
Contact data	Configuration		1 form A (SPST)			
	Construction		Single			
	Material		T and V: AgSnO ₂			
	Resistance		Max. 100mΩ		Initial at 1A, 6VDC	
	Contact rating		5A, 250VAC, 30VDC		Resistive	
	Max. inrush current		78A, 250VAC (TV-5)	51A, 250VAC (TV-3)		
	Max. carrying current		5A			
	Max. switching voltage		277VAC, 30VDC			
	Max. switching power		1,250VA, 150W			
	Min. switching load *1		10 mA, 5VDC			
Coil	Rated power (20°C)		280mW			
	Operating temperature range		-40°C ~ +85°C (at rated voltage)		No frost	
Timing data	Operate		Max. 10ms		without bounce, no diode	
	Release		Max. 10ms		without bounce, no diode	
Life	Mechanical		Min. 5 x 10 ⁶ operations			
	Electrical (resistive)		Min. 100 x 10 ³ operations (3A, 250VAC/30VDC) Min. 50 x 10 ³ operations (5A, 250VAC/30VDC)		At rated load	
	Electrical (lamp)		Min. 25 x 10 ³ ops. (UL TV-5)	Min. 25 x 10 ³ ops. (UL TV-3)		
Insulation	Insulation resistance		Min. 1000MΩ at 500VDC			
	Dielectric strength	Open contacts	750VAC (50/60Hz), 1 minute			
		Coil contact	4000VAC (50/60Hz), 1 minute			
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave			
	Clearance		6mm			
	Creepage		6mm			
	EN61810-1, VDE0435	Voltage		250V		
		Pollution		2		
Material group		III				
Other	Vibration resistance	Misoperation ≥1us	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm		Direction X, Y, Z, contact ON/OFF total 6 cycles	
		Endurance	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm		Direction X, Y, Z, contact OFF total 6 hours	
	Shock resistance	Misoperation ≥1us	Min. 100m/s ² (11 ± 1ms)		Direction X, Y, Z, contact ON/OFF total 36 times	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)		Direction X, Y, Z, contact OFF total 18 times	
	Dimensions / weight		Slim type: 7.0 x 20.3 x 15.0 mm Flat type: 15.0 x 20.3 x 7.0 mm / approx. 6g			
	Sealing		Plastic sealed RTIII			

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions

FTR-F3 Series

■ Coil Data

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
003	3	32.1	2.25	0.3	280
005	5	90	3.75	0.5	
006	6	130	4.5	0.6	
009	9	290	6.75	0.9	
012	12	515	9	1.2	
018	18	1,160	13.5	1.8	
024	24	2,060	18	2.4	

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

*: Specified operated values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

■ Safety Standards


Type	Compliance	Contact rating
UL	UL 508 File No. E63614	Flammability: UL 94-V-0 (plastics) FTR-F3PA(...) V, FTR-F3AA(...) V 3A, 250VAC / 30VDC resistive 5A, 250VAC / 30VDC resistive TV-5, 120VAC FTR-F3PA(...) T, FTR-F3AA(...) T 3A, 250VAC/30VDC resistive 5A, 250VAC/30VDC resistive TV-3, 120VAC
CSA	C22.2 No. 14 File No. LR 40304	
VDE	IEC/EN61810-1 EN60065 clause 14.6.1	FTR-F3PA(...) V, FTR-F3AA(...) V 3A, 250 VAC, $\cos\phi = 1$ 5A, 250 VAC, $\cos\phi = 1$ 3A, 30VDC (L/R=0ms) 5A, 30VDC (L/R=0ms) FTR-F3PA(...) T, FTR-F3AA(...) T 3A, 250 VAC, $\cos\phi = 1$ 5A, 250 VAC, $\cos\phi = 1$ 3A, 30VDC (L/R=0ms) 5A, 30VDC (L/R=0ms)
CQC	GB15092.1 / GB/T21711.1 10002049449, 17002164382	5A 250VAC / 30VDC

FTR-F3 Series


■ Characteristic Data (Reference)

* Characteristic data is not guaranteed value but measured values of samples from production line.


Coil temperature rise

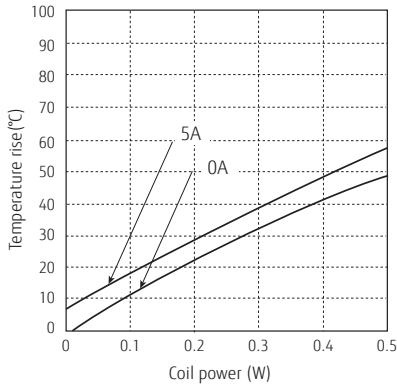


Operating range

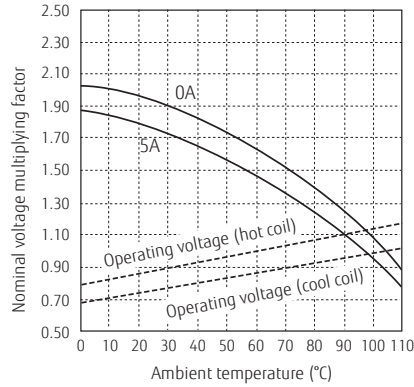


Maximum switching power

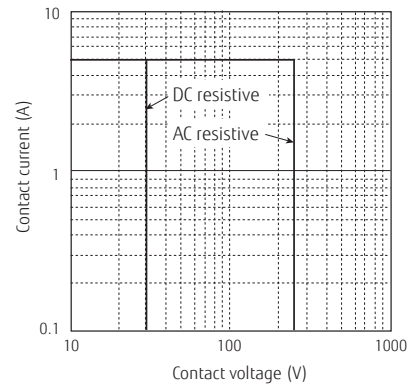


Life curve

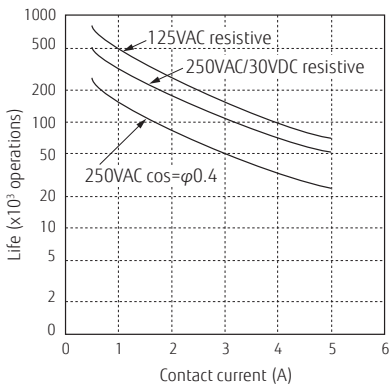

Distribution of operate/release voltage (pulse)

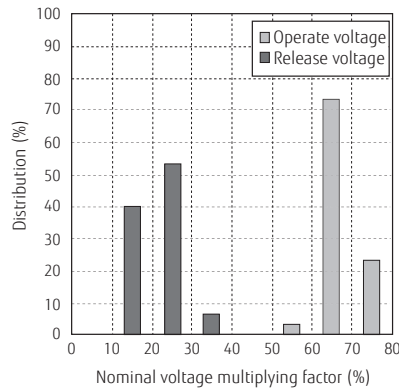

Distribution of contact resistance (at 1A 6VDC)

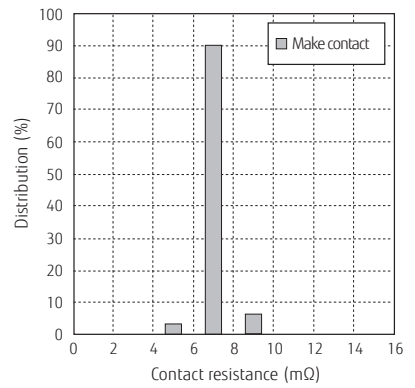


FTR-F3 Series


■ Dimensions

- Dimensions

Standard type - FTR-F3AA(...)(V,T)

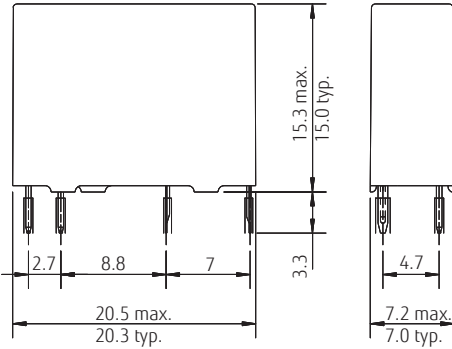


Right angle type - FTR-F3PA(...)(V,T)

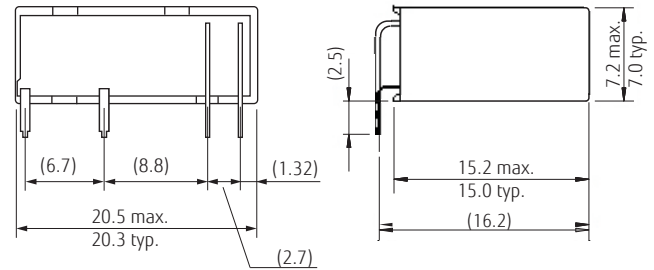


* Dimensions of the terminals do not include thickness of pre-solder.

- Schematics
(BOTTOM VIEW)

Standard type - FTR-F3AA(...)(V,T)




Right angle type - FTR-F3PA(...)(V,T)




- PC Board Mounting Hole Layout
(BOTTOM VIEW)

Standard type - FTR-F3AA(...)(V,T)



Right angle type - FTR-F3PA(...)(V,T)



(): Reference value
Unit: mm

* Tolerance of PC board mounting hole layout: ±0.1 unless otherwise specified.

FTR-F3 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360°C

Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

FTR-F3 Series

Fujitsu Components International Headquarter Offices

Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	Asia Pacific FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	Korea FUJITSU COMPONENTS KOREA LIMITED Alpha Tower #403, 645 Somyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
North and South America FUJITSU COMPONENTS AMERICA, INC 2290 North First Street, Suite 212 San Jose, CA 95131, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcsh@cn.fujitsu.com Web: www.fujitsu.com/cn/products/devices/components/	
Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	Hong Kong FUJITSU COMPONENTS HONG KONG CO., LTD Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Tex: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

© 2019 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch systems, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death.

Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications.

In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications.

Fujitsu warrants that its Products, if properly used and serviced, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery.

The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. December 23rd, 2019