


# POWER RELAY

## 1 POLE - 16A 105 °C Sealed Type

### FTR-K1 Series

#### ■ FEATURES

- 1 pole
  - 16A
  - 1 form A / 1 form C
  - Coil sensitive 400mW
  - High insulation in small package (between coil and contacts)
    - Insulation distance: 10mm min.
    - Dielectric strength: 5,000VAC
    - Surge strength: 10,000V
  - UL F class isolation wire
  - Cadmium free contacts
  - Sealed type, RTIII
  - RoHS compliant
- Please see page 7 for more information



#### ■ PARTNUMBER INFORMATION

**[Example]**       $\frac{\text{FTR-K1}}{\text{(a)}}$      $\frac{\text{C}}{\text{(b)}}$      $\frac{\text{K}}{\text{(c)}}$      $\frac{\text{005}}{\text{(d)}}$      $\frac{\text{W}}{\text{(e)}}$     -     $\frac{\text{KW}}{\text{(f)}}$

|     |                            |  |
|-----|----------------------------|--|
| (a) | Relay type                 | FTR-K1 : FTR-K1-Series                             |
| (b) | Contact configuration      | A : 1 form A<br>C : 1 form C                       |
| (c) | Coil type                  | K : Standard type (400mW)                          |
| (d) | Coil rated voltage         | 005 : 5.....110 VDC<br>Coil rating table at page 3 |
| (e) | Contact material / TV type | W : AgSnO <sub>2</sub>                             |
| (f) | Special type               | KW : 105 °C, Plastic sealed type, RTIII            |

Actual marking does not carry the type name : "FTR"

E.g.: Ordering code: FTR-K1CK005W-KW

Actual marking: K1CK005W-KW

# FTR-K1 SERIES

## ■ SPECIFICATION

| Item         |                                      |                       | FTR-K1 CK ( ) W-KW                        | FTR-K1 AK ( ) W-KW                   |
|--------------|--------------------------------------|-----------------------|---|--------------------------------------|
| Contact Data | Configuration                        |                       | 1 form C                                  | 1 form A                             |
|              | Construction                         |                       | Single                                    |                                      |
|              | Material                             |                       | AgSnO <sub>2</sub>                        |                                      |
|              | Resistance (initial)                 |                       | Max. 100mΩ at 1A, 6VDC                    |                                      |
|              | Contact rating (resistive)           |                       | 16A, 250VAC                               |                                      |
|              | Max. carrying current * <sup>1</sup> |                       | 20A                                       |                                      |
|              | Max. switching voltage               |                       | 440VAC                                    |                                      |
|              | Max. switching power                 |                       | 4,000VA                                   |                                      |
|              | Min. switching load * <sup>2</sup>   |                       | 100mA, 5VDC                               |                                      |
| Life         | Mechanical                           |                       | Min. 20 x 10 <sup>6</sup> operations      |                                      |
|              | Electrical                           | Rating resistive load | Min. 10 x 10 <sup>3</sup> operations      | Min. 20 x 10 <sup>3</sup> operations |
| Coil Data    | Rated power (20 °C)                  |                       | 400 to 430 mW                             |                                      |
|              | Operating power (20 °C)              |                       | 200 to 210 mW                             |                                      |
|              | Operating temperature range          |                       | -40 °C to +105 °C (no frost)              |                                      |
| Timing Data  | Operate (at nominal voltage)         |                       | Max. 15ms (without bounce, no diode)      |                                      |
|              | Release (at nominal voltage)         |                       | Max. 5ms (without bounce, no diode)       |                                      |
| Insulation   | Resistance (initial)                 |                       | Min. 1,000MΩ at 500VDC                    |                                      |
|              | Dielectric strength                  | Open contacts         | 1,000VAC (50/60Hz) 1min                   |                                      |
|              |                                      | Contacts to coil      | 5,000VAC (50/60Hz) 1min                   |                                      |
|              | Surge strength                       | Coil to contacts      | 10,000V / 1.2 x 50μs standard wave        |                                      |
|              | Clearance                            |                       | 10mm                                      |                                      |
|              | Creepage                             |                       | 10mm                                      |                                      |
|              | EN61810-1, VDE0435                   | Voltage               | 250                                       |                                      |
|              |                                      | Pollution degree      | 3   |                                      |
|              |                                      | Material group        | III a                                     |                                      |
|              | Category                             | C / 250V              |   |                                      |
| Other        | Vibration resistance                 | Misoperation≥1us      | 10 to 55 to 10 Hz single amplitude 0.35mm |                                      |
|              |                                      | Endurance             | 10 to 55 to 10Hz single amplitude 0.75mm  |                                      |
|              | Shock                                | Misoperation≥1us      | 100m/s <sup>2</sup> (11 ± 1ms)            |                                      |
|              |                                      | Endurance             | 1,000m/s <sup>2</sup> (6 ± 1ms)           |                                      |
|              | Weight                               |                       | Approximately 13g                         |                                      |
|              | Sealing                              |                       | RTIII                                     |                                      |

\* 1: Need to consider the heat from PCB when max. current is more than 10A.

\* 2: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

# FTR-K1 SERIES

## ■ COIL RATING

| Coil Code | Rated Coil Voltage (VDC) | Coil Resistance +/- 10% (Ohm) | Must Operate Voltage (VDC) * | Must Release-Voltage (VDC) * | Rated Power (mW) |
|-----------|--------------------------|-------------------------------|------------------------------|------------------------------|------------------|
| 005       | 5                        | 62                            | 3.5                          | 0.5                          | 400              |
| 006       | 6                        | 90                            | 4.2                          | 0.6                          |                  |
| 009       | 9                        | 202                           | 6.3                          | 0.9                          |                  |
| 012       | 12                       | 360                           | 8.4                          | 1.2                          |                  |
| 018       | 18                       | 810                           | 12.6                         | 1.8                          |                  |
| 022       | 22                       | 1,210                         | 15.4                         | 2.2                          |                  |
| 024       | 24                       | 1,440                         | 16.8                         | 2.4                          |                  |
| 028       | 28                       | 1,960                         | 19.6                         | 2.8                          |                  |
| 048       | 48                       | 5,360                         | 33.6                         | 4.8                          | 430              |
| 060       | 60                       | 8,570                         | 42.0                         | 6.0                          | 420              |
| 110       | 110                      | 28,800                        | 77.0                         | 11.0                         | 420              |

Note: All values in the table are valid for 20°C and zero contact current.

\* Specified operate values are valid for pulse wave voltage.






Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

## ■ SAFETY STANDARDS


| Type | Compliance  | Contact rating   |                                |
|------|---|--|--------------------------------|
|      |   | FTR-K1AK( )W-KW  | FTR-K1CK( )W-KW                |
| UL   | 508<br>E 63614  | Flammability: UL 94-V0 (plastics)                                |                                |
|      |   | 16A, 277VAC (resistive) 105 °C<br>20A, 277VAC (resistive) 105 °C | 16A, 277VAC (resistive) 105 °C |
| CSA  | C22.2 No.14<br>LR40304  | 16A, 277VAC (resistive)  |                                |
| VDE  | IEC/EN61810-1,<br>EN60730-1 clause 12.2; 13.2;<br>20.1; 20.2; 20.3,<br>EN60335-1 clause 15.3; 16.3;<br>29.1; 29.2; 29.3 | 16A, 250VAC (cosφ1), 105 °C<br>20A, 250VAC (cosφ1), 105 °C       | 16A, 250VAC (cosφ1), 105 °C    |

## CHARACTERISTIC DATA (Reference)


\* Characteristic data is not a guaranteed value, but measured values of samples from production line.

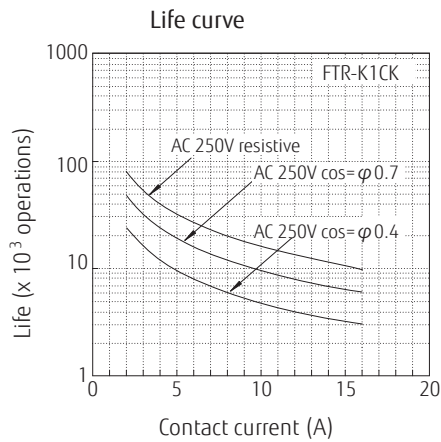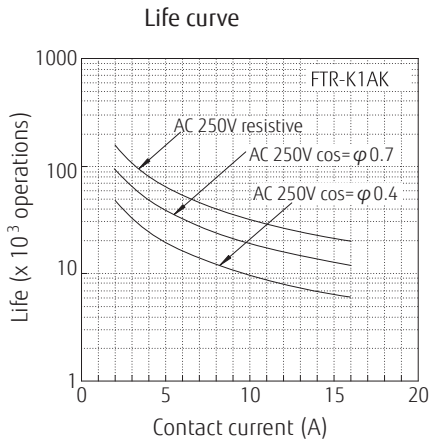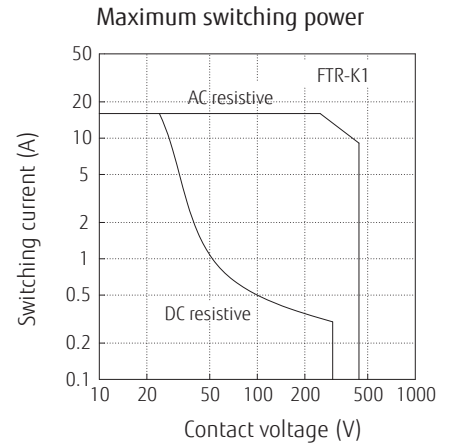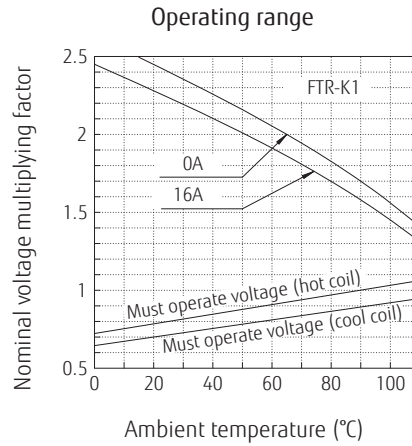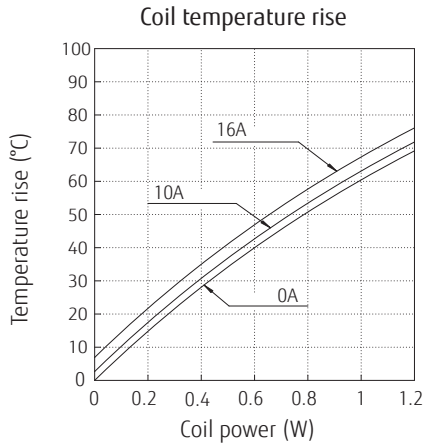


Distribution of operate, release voltage

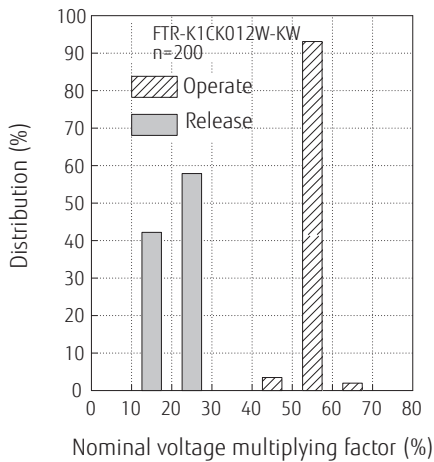

Distribution of operate, release time

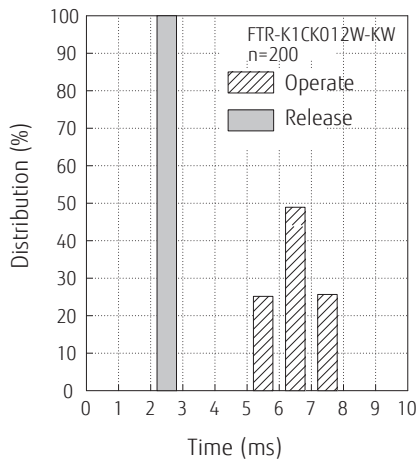

Distribution of contact resistance

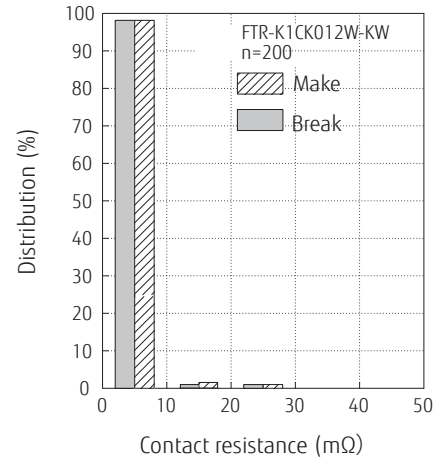


# FTR-K1 SERIES


## ■ DIMENSIONS

FTR-K1AK( )W-KW

### ● Dimensions

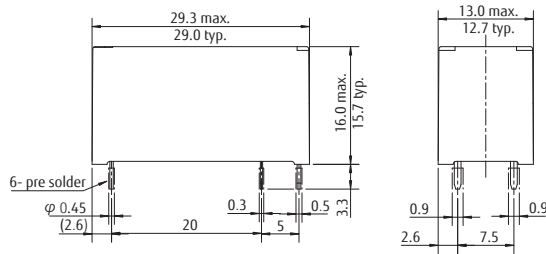


### ● Schematics




Connect terminal #1 and #8 on the PC board

### ● PC board mounting hole layout (BOTTOM VIEW)




FTR-K1CK( )W-KW

### ● Dimensions

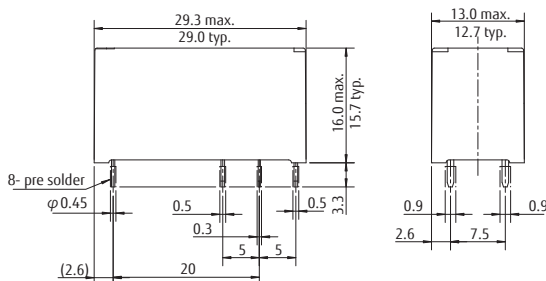


### ● Schematics



Connect terminal #1 and #8 on the PC board

### ● PC board mounting hole layout (BOTTOM VIEW)



\* Dimensions of the terminals do not include thickness of pre-solder.

\* Tolerance of PC board mounting hole layout :  $\pm 0.1$  unless otherwise specified.

Unit: mm

## Cautions

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

## RoHS Compliance and Lead Free Information

### 1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives.  
As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:  
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.  
This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Condition

- Recommended solder Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-heating: maximum 120°C  
within 90 sec.  
Soldering: dip within 5 sec. at  
255°C ± 5°C solder bath  
Relay must be cooled by air immediately  
after soldering

#### Solder by Soldering Iron:

Soldering Iron 30-60W  
Temperature: maximum 350-360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

|  |  |  |
|--|--|--|
| <b>Japan</b><br>FUJITSU COMPONENT LIMITED<br>Shinagawa Seaside Park Tower 19F,<br>12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,<br>Tokyo, 140-0002, Japan<br>Tel: (81-3) 3450-1682<br>Fax: (81-3) 3474-2385<br>Email: fcl-contact@cs.jp.fujitsu.com<br>Web: www.fujitsu.com/jp/fcl/ | <b>Asia Pacific</b><br>FUJITSU COMPONENTS ASIA, LTD.<br>102E Pasir Panjang Road<br>#01-01 Citilink Warehouse Complex<br>Singapore 118529<br>Tel: (65) 6375-8560<br>Fax: (65) 6273-3021<br>Email: fcal@sg.fujitsu.com<br>Web: www.fujitsu.com/sg/products/devices/components                        | <b>Korea</b><br>FUJITSU COMPONENTS KOREA LIMITED<br>Alpha Tower #403, 645 Samsyeong-dong,<br>Bundang-gu, Seongnam-si, Gyeonggi-do,<br>13524 Korea<br>Tel: (82) 31-708-7108<br>Fax: (82) 31-709-7108<br>Email: fcal@sg.fujitsu.com<br>www.fujitsu.com/sg/products/devices/components/ |
| <b>North and South America</b><br>FUJITSU COMPONENTS AMERICA, INC<br>2290 North First Street, Suite 212<br>San Jose, CA 95131, USA<br>Tel: (1-408) 745-4900<br>Fax: (1-408) 745-4970<br>Email: components@us.fujitsu.com<br>Web: us.fujitsu.com/components                           | <b>China</b><br>FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.<br>Unit 4306, InterContinental Center<br>100 Yu Tong Road, Shanghai 200070,<br>China<br>Tel: (86-21) 3253 0998<br>Fax: (86-21) 3253 0997<br>Email: fcal@sg.fujitsu.com<br>Web: www.fujitsu.com/sg/products/devices/components   |  |
| <b>Europe</b><br>FUJITSU COMPONENTS EUROPE B.V.<br>Diamantlaan 25<br>2132 WV Hoofddorp<br>Netherlands<br>Tel: (31-23) 5560910<br>Fax: (31-23) 5560950<br>Email: info@fceu.fujitsu.com<br>Web: www.fujitsu.com/uk/components  | <b>Hong Kong</b><br>FUJITSU COMPONENTS HONG KONG CO., LTD<br>Unit 506, Inter-Continental Plaza<br>No.94 Granville Road, Tsim Sha Tsui, Kowloon,<br>Hong Kong<br>Tel: (852) 2881-8495<br>Tex: (852) 2894-9512<br>Email: fcal@sg.fujitsu.com<br>Web: www.fujitsu.com/sg/products/devices/components/ |  |

©2019 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. June 10, 2019