


POWER RELAY

1 POLE - 25A Latching Relay

FTR-K3L Series

■ FEATURES

- 1 pole, 25A, 1 form A
- 2 coils latching type
- High insulation (between coil and contacts)
 Insulation distance:
 clearance min. 6.4mm
 creepage min. 9.5mm
 Dielectric strength: 5,000VAC
 Surge strength: 8,500V
- Cadmium free contact for eco-program
- Plastic materials
 - UL 94 flame class V-0
- Flux proof, RT II
- RoHS compliant
 Please see page 5 for more information

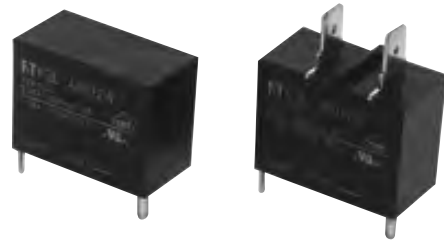

■ PARTNUMBER INFORMATION

[Example] FTR-K3L A B 012 W
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-K3L : FTR-K3L-Series
(b)	Contact configuration	A : 1 form A / PCB type J : 1 form A / Tab type
(c)	Coil power	B : Standard sensitive(0.9W)
(d)	Coil rated voltage	012 : 5.....24 VDC Coil rating table at page 3
(e)	Contact material	W : Silver alloy

Actual marking does not carry the type name : "FTR"
 E.g.: Ordering code: FTR-K3LAB012W Actual marking: K3LAB012W

■ SPECIFICATION

Item	FTR-K3L		
Contact Data	Configuration	1 form A	
	Construction	Single	
	Material	Silver alloy	
	Resistance (initial)	Max. 100 mΩ at 6VDC, 1A	
	Contact rating (resistive)	25A, 250VAC	
	Max. carrying current	30A	
	Max. switching voltage	250VAC	
	Max. switching power	6,250VA	
	Max. switching current	25A	
	Min. switching load *	100mA, 5VDC	
Life	Mechanical	Min. 1 x 10 ⁶ operations	
	Electrical (resistive)	25A, 250VAC, min. 100 x 10 ³ operations	
Coil Data	Rated power (at 20 °C)	900mW	
	Operating temperature range	-40 °C to +85 °C (no frost)	
Timing Data	Set (at nominal voltage)	Max. 20ms (without bounce, without diode)	
	Reset (at nominal voltage)	Max. 20ms (without bounce, without diode)	
	Coil excitation time (at nominal voltage)	Min. 30ms, max. 1,000ms	
Insulation	Resistance	Min. 1,000MΩ at 500VDC	
	Dielectric strength	Open contacts	1,000VAC (50/60Hz) 1min
		Coil to contacts	5,000VAC (50/60Hz) 1min
	Surge strength	Coil to contacts	8,500V / 1.2 x 50μs standard wave
	Clearance		6.4mm
Creepage		9.5mm	
Other	Vibration resistance	Misoperation	10 to 55 to 10Hz single amplitude 0.825mm
		Endurance	10 to 55 to 10Hz single amplitude 1.0mm
	Shock	Misoperation	Min. 200m/s ² (11 ± 1ms)
		Endurance	Min. 1,000m/s ² (6 ± 1ms)
	Weight		Approximately 25 g
Sealing		Flux proof RT II	

* Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

! Care shall be taken on the heat generated on PC board when maximum carrying current exceeds 10A. Please perform the confirmation test with actual conditions.

FTR-K3L SERIES

■ COIL RATING

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Set Voltage* (VDC)	Reset Voltage* (VDC)	Max. Applicable Voltage (VDC)	Rated Power (mW)
005	5	P 28	+4.0	-	9.0	900
		S 28	-	+4.0		
006	6	P 40	+4.8	-	10.8	
		S 40	-	+4.8		
012	12	P 160	+9.6	-	21.6	
		S 160	-	+9.6		
024	24	P 640	+19.2	-	43.2	
		S 640	-	+19.2		

P: Set coil, S: Reset coil

Note: All values in the tables are valid for 20°C and zero contact current.

* Specified operate values are valid for pulse wave voltage.

! Please use at rated coil voltage. Continuous energization on coil at the voltage exceeding max. applicable voltage is prohibited. Insulation deterioration may occur.

! Do not apply any voltage exceeding max. applicable voltage on reset coil. Operation failure or mis-operation may occur.

■ SAFETY STANDARDS


Type	Compliance	Contact rating
cULus	UL 508 CSA 22.2 No. 14 E63614	Flammability: UL 94-V0 (plastics)
		25A, 277VAC (resistive at 85°C)
VDE	IEC/EN61810-1	25A, 250VAC ($\cos=\varphi 1$), 100K operations at 60°C, 60K operations at 85°C

FTR-K3L SERIES


■ DIMENSIONS

● Dimensions

FTR-K3LAB type


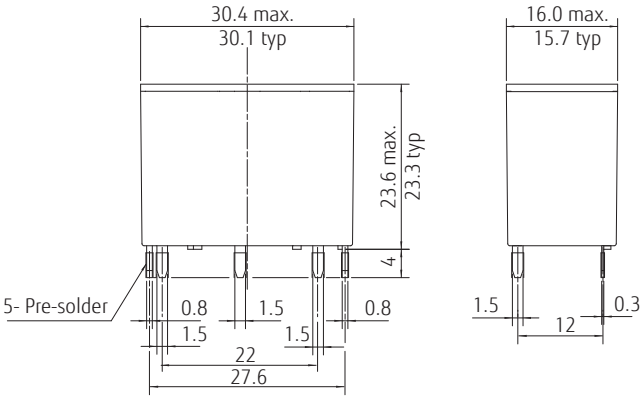


FTR-K3LJB type

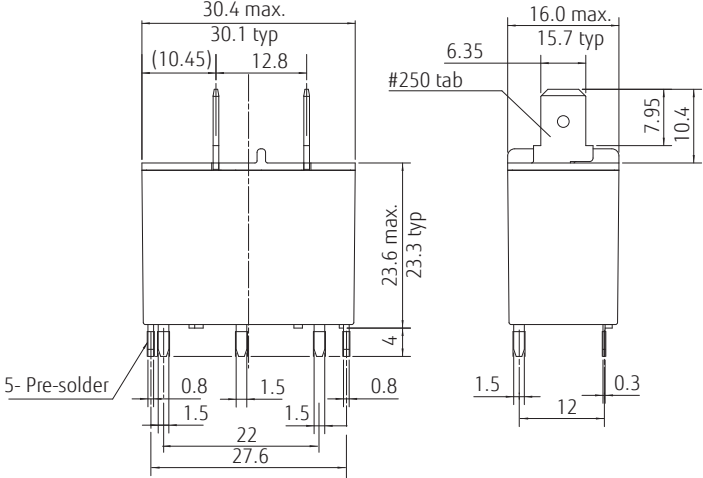


* Dimensions do not include tolerances.
 * Dimensions of the terminals do not include thickness of pre-solder.

● Schematics

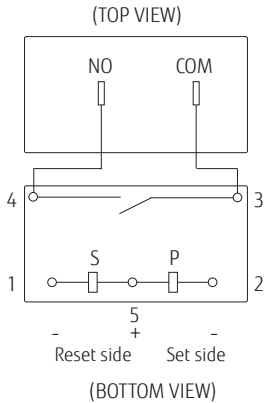

P: Set coil
 S: Reset coil
 * Contacts drawn in reset condition.
 * To operate (set), apply + to pin 5 and - to pin 2. To release (reset), apply + to pin 5 and - to pin 1.





● PC board mounting hole layout

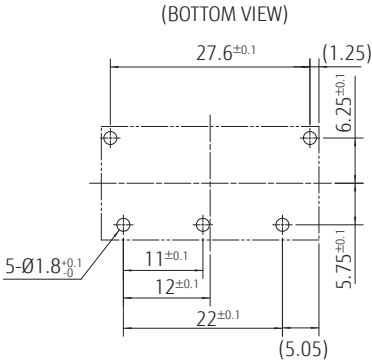

(): Reference
 Unit: mm

CHARACTERISTIC DATA

(Characteristic data is not guaranteed value but measured values of samples from production line.)

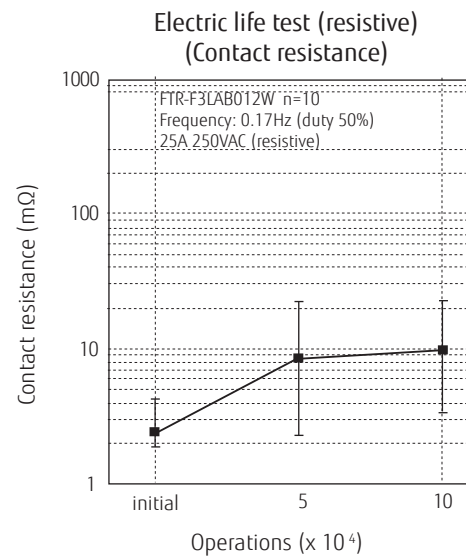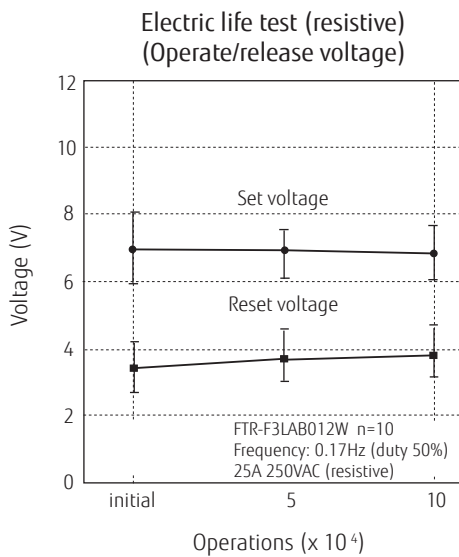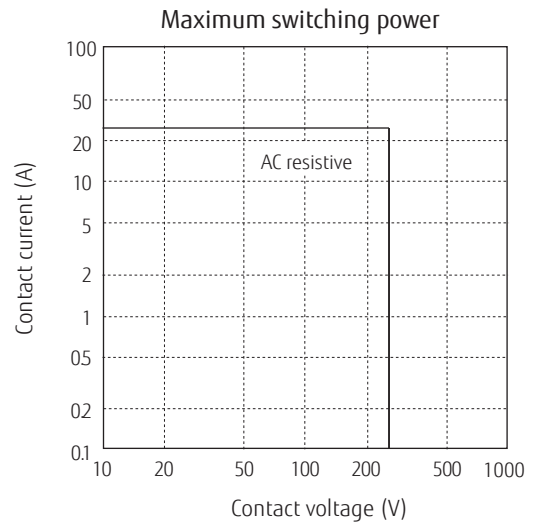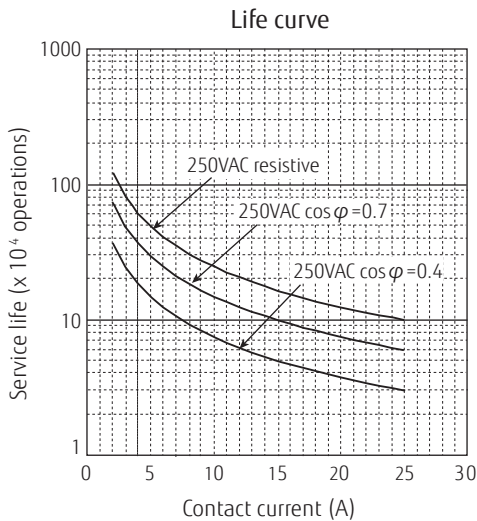

Cautions

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

Cautions for latching relays

- Latching relays are shipped in the state set, but state may change due to shock during transportation or mounting. Before using the relays, it is advisable to bring the relays in necessary state (set or reset) and program a circuit sequence. Otherwise, it will or will not operate simultaneously with power activation.
- Please connect relay coils according to specified polarity.
- Do not apply voltage to both set coil and reset coil at a time.

RoHS Compliance and Lead Free Information

1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives.
As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.
This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Condition

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-heating: maximum 120°C
within 9 sec.
Soldering: dip within 5 sec. at
255°C ± 5°C solder bath
Relay must be cooled by air immediately
after soldering

Solder by Soldering Iron:

Soldering Iron 30-60W
Temperature: maximum 350-360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower 19F,
12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,
Tokyo, 140-0002, Japan
Tel: (81-3) 3450-1682
Fax: (81-3) 3474-2385
Email: fcl-contact@cs.jp.fujitsu.com
Web: www.fujitsu.com/jp/fcl/

North and South America

FUJITSU COMPONENTS AMERICA, INC
2290 North First Street, Suite 212
San Jose, CA 95131, USA
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: us.fujitsu.com/components

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fujitsu.com/uk/components

Asia Pacific

FUJITSU COMPONENTS ASIA, LTD.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components

China

FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070,
China
Tel: (86-21) 3253 0998
Fax: (86-21) 3253 0997
Email: fcsh@cn.fujitsu.com
Web: www.fujitsu.com/cn/products/devices/components/

Hong Kong

FUJITSU COMPONENTS HONG KONG CO., LTD
Unit 506, Inter-Continental Plaza
No.94 Granville Road, Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: (852) 2881-8495
Tex: (852) 2894-9512
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components/

Korea

FUJITSU COMPONENTS KOREA LIMITED
Alpha Tower #403, 645 Sampyeong-dong,
Bundang-gu, Seongnam-si, Gyeonggi-do,
13524 Korea
Tel: (82) 31-708-7108
Fax: (82) 31-709-7108
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/components/

©2019 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. September 12, 2019